

### High Altitude Electromagnetic Pulse (HEMP) and Lightning (LEMP) Protection for HF Bands (1-40 MHz)

These coaxial protectors dramatically reduce electrical energy from high-speed HEMP or Electro-Static Discharge (ESD) or lightning activity. The HF bands are particularly difficult to protect, since much of the energy is in the pass band. NexTek has optimized the circuits to provide maximum suppression, while allowing desired operational throughput. These compact protectors are compliant to MIL-STD 188-125 and MIL-STD 461 pulses.

#### FEATURES:

- ✔ High-Speed Protection Design
- ✔ Ultra-Low Let-Through Energy
- ✔ Type N Connectors
- ✔ 1-40 MHz Operating Frequency
- ✔ DC Block
- ✔ HEMP Tested and Verified Design
- ✔ Excellent Insertion Loss and Return Loss
- ✔ Bulkhead Mounting

#### APPLICATION:

- ✔ Low Power (10dBm)
- ✔ MIL STD 188-125 Receive Applications




#### Transient Specifications

LEMP Waveform	IEC 61000-4-5 8 x 20 $\mu$ s		
LEMP Maximum Surge	30 kA		
LEMP Multi-Strike (10x)	20 kA		
LEMP Let-Through (@ 2kA)	Peak Voltage (V)	Energy into 50 $\Omega$ ( $\mu$ J)	
	4.5	0.05	
HEMP Waveform	MIL-STD 188-125 20 x 500ns		
HEMP Surge (250x)	300kV/5kA		
HEMP Residual (20x500ns @ 1kA)	Peak Current (A)	Peak Rate of Rise (A/s)	Root Action (A $\sqrt$ s)
	0.10	1x10 <sup>8</sup>	5.5x10 <sup>-5</sup>

RF Bands and Performance

Impedance	50Ω	
Frequency	1 - 40 MHz	
VSWR (Typ / Max)		
1-2 MHz	1.10 / 1.20	
2-10 MHz	1.06 / 1.10	
10-40 MHz	1.08 / 1.12	
Insertion Loss (dB) (Typ / Max)		
1-5 MHz	0.07 / 0.15	
5-30 MHz	0.05 / 0.07	
30-40 MHz	0.15 / 0.30	
RF Power	Watts	Vpeak
	0.01	1.0

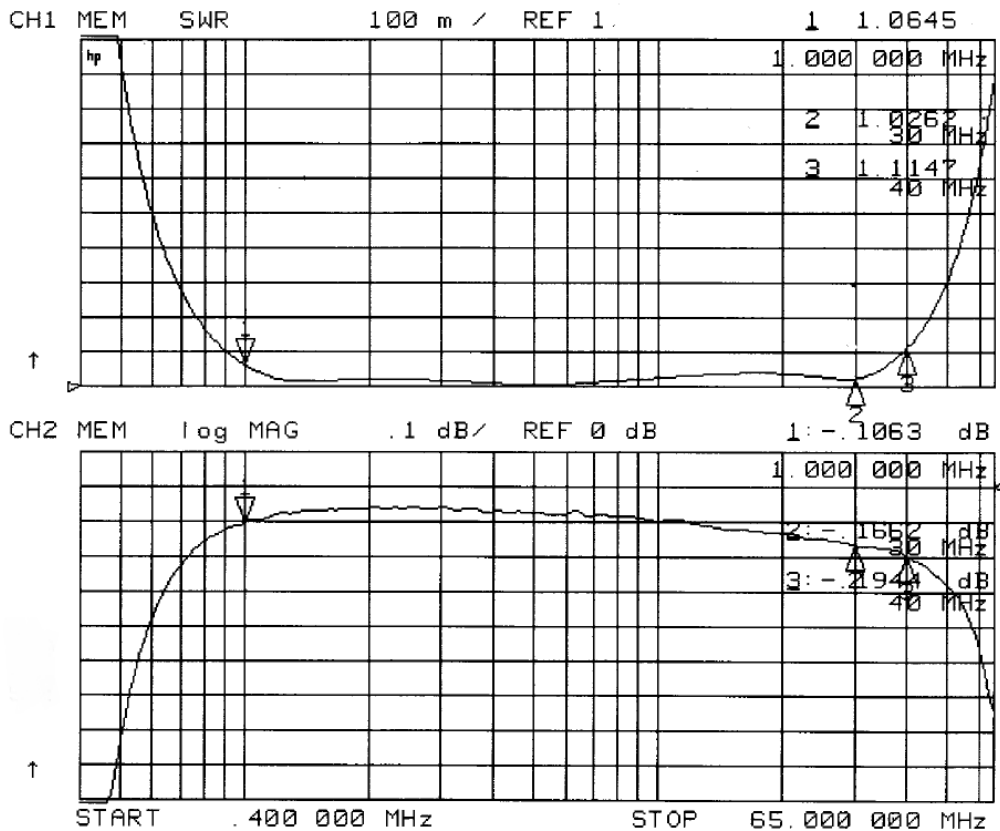

### Environmental Specifications (\*when mated with sealed connectors)

Temperature Range	-50°C to +90°C
Salt Fog	MIL-STD 202 Method 101D / Cond B 24Hrs*
Water Proof	IEC529 IP68*
Moisture Resistance	MIL-STD 202 Method 106E (65°C/98% RH condensing/240 hours)*
Temperature Shock	MIL-STD 202 Method 107D / Condition B-1 (25x @ -65°C to +125°C)
Life (Elevated Temperature)	MIL-STD 202 Method 108A / Condition A (96 hours at 100°C)
Vibration	MIL-STD 202 Method 204D / Condition D (10Hz-2kHz 0.06" DA/20g)
Mechanical Shock	MIL-STD 202 Method 213 / Condition A (50g/11ms ~24")

### Material and Finish

Body Material	Aluminum
Body Finish	Nickel
Connector Material	Brass
Connector Finish	Nickel
Center Pin Material	BeCu
Center Pin Finish	Gold

